



# SAAMI New Cartridge & Chamber

Maximum Average Pressure (MAP)\* = 65,000 psi  
 Crusher pressures not established.

Instrumental Velocity: 127-gr @ 3,400 fps

\* Refer to ANSI/SAAMI Z299.4 for pressure guideline interpretation description.

**ISSUED: 01/16/2017 6.5-300 Weatherby Magnum [6.5-300 WBY MAG] REVISED: - / - / - -**

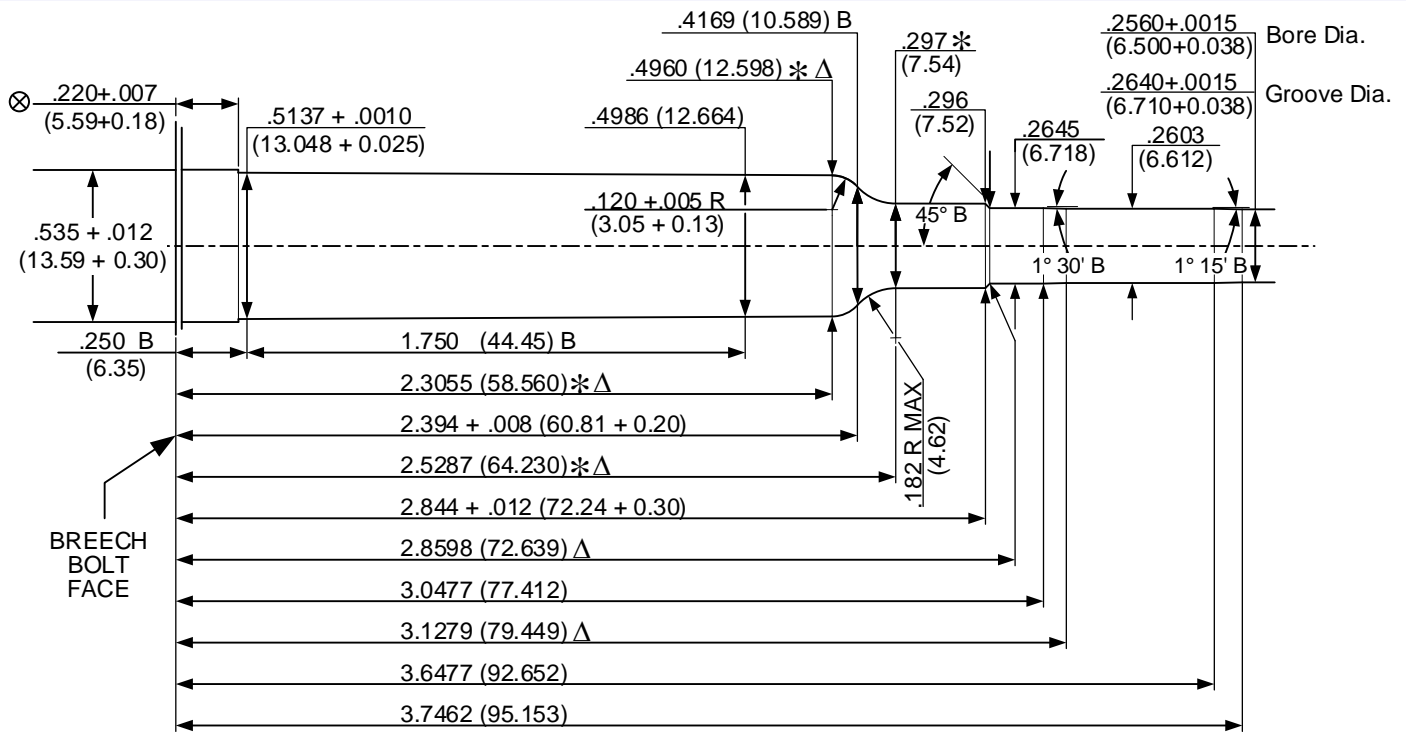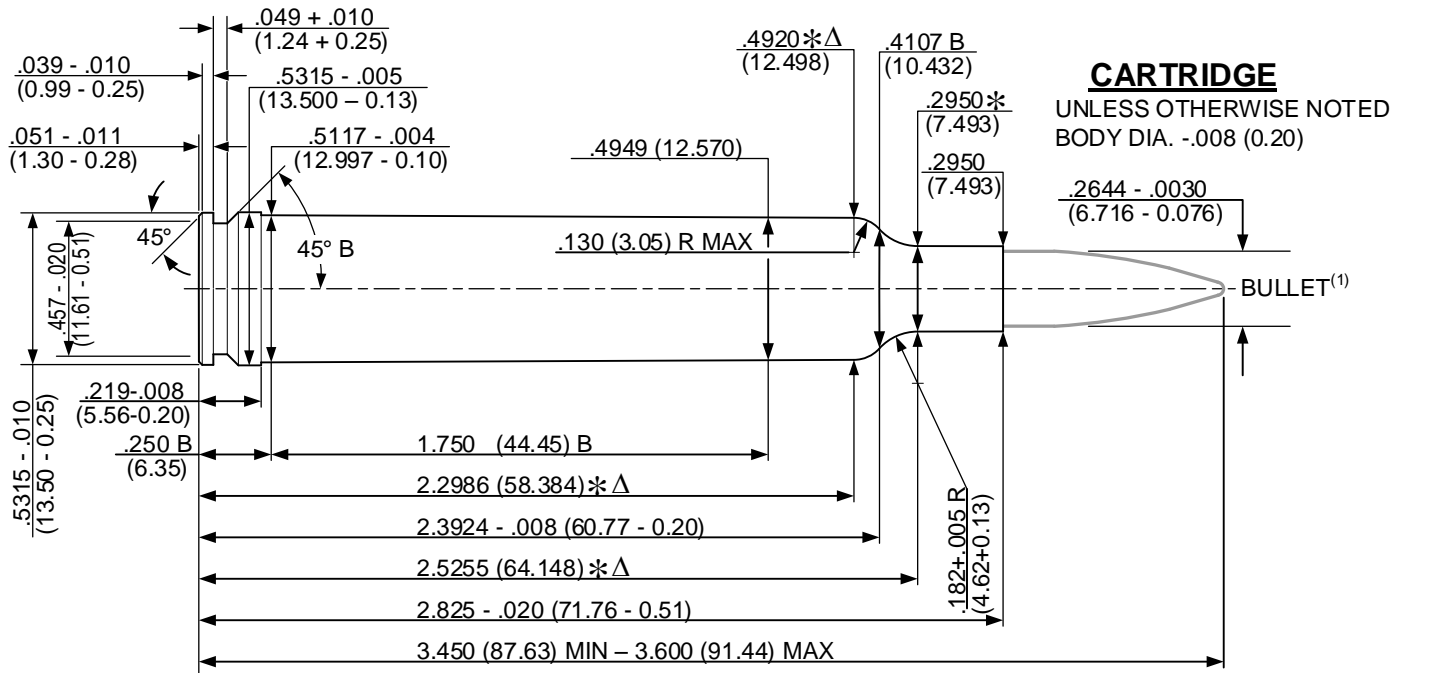

## CHAMBER

UNLESS OTHERWISE NOTED  
 ALL DIA +.002 (0.05)  
 LENGTH TOL. +.015 (0.38)

$\Delta$  6 GROOVES  
 $\Delta$  .095 + .002 [2.41 + 0.05] WIDE  
 TWIST: 8.00 [203.2] R.H. OPTIONAL  
 MIN. BORE & GROOVE AREA:  
 .0538 SQ. IN. [34.709 MM<sup>2</sup>]

**DO NOT SCALE FROM DRAWING**

**NOTE:**

- B = BASIC
- $\Delta$  = REFERENCE DIMENSION
- ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)
- (1) - BULLET PROFILE IS SHOWN FOR ILLUSTRATIVE PURPOSES ONLY
- (XX.XX) = MILLIMETERS
- \* = DIMENSIONS ARE TO INTERSECTION OF LINES

$\otimes$  = HEADSPACE DIMENSION